


G80 Webbing Sling Connector (TCSH001)

- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.

Size	W.L.L (t)	B.L (t)	Dimension (mm)						N.W. (kg/pc)
			A	B	K	W	G	E	
6-8	1.12	4.48	15	60	56	40	18	7	0.2
7/8-8	2.0	8.0	20	61.5	63.7	40	24	9.5	0.3
10-8	3.15	12.6	24	66	83	39	30.5	11	0.68
13-8	5.3	21.2	28	88	93.7	55	36.8	16.5	1.47
16-8	8	32	34.5	108	120	65.5	45.2	19.8	2.3
20-8	12.5	50	41	129	138	80	51.8	23	3.3






G80 Omega Link (TCSH002)

- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.

Size	W.L.L (t)	B.L (t)	Dimension (mm)					N.W. (kg/pc)
			A	B	Φ	H	L	
6-8	1.12	4.48	8	41	20.5	25	52	0.13
7/8-8	2.0	8.0	10	52	23.5	35	68.5	0.21
10-8	3.15	12.6	12	62	31.5	40.5	81	0.36
13-8	5.3	21.2	15	81	41	54	108	0.71
16-8	8	32	19	99	49.5	64	126	1.30
20-8	12.5	50	23	118	58	75.6	152	2.2






G80 Clevis Link (TCSH003)

- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.

Size	W.L.L (t)	B.L (t)	Dimension (mm)						N.W. (kg/pc)
			A	B	D	H	K	L	
7/8-8	2	8.0	9.5	33	27	45	69	102	0.22
10-8	3.15	12.6	13	45.5	27	45	72	116	0.45






G80 Clevis Choke Link(TCSH004)

- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.

Size	W.L.L (t)	B.L (t)	Dimension (mm)						N.W. (kg/pc)
			A	B	D	H	K	L	
10-8	3.15	12.6	12.5	46	50	140	173	209	0.82
13-8	5.3	21.2	16.5	58	66	140	182	227	1.75






G80 Long Shape Omega Link (TCSH005)

- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.

Size	W.L.L (t)	B.L (t)	Dimension (mm)					N.W. (kg/pc)
			A	B	D	K	L	
6-8	1.12	4.48	8	28	20	47.5	75	0.12
7/8-8	2.0	8.0	10.5	32.5	25	59	92	0.17
10-8	3.15	12.6	13	45.5	30	78.5	123	0.43
13-8	5.3	21.2	15	57.5	46	94	154	1.00






G80 Sling Hook with Link (TCSH006)

- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.

Size	W.L.L (t)	B.L (t)	Dimension (mm)					N.W. (kg/pc)
			E	B	Φ	K	L	
7/8-8	2	8	32.5	18	37	87	149	0.52






G80 Clevis Swivel Self-Locking Hook (TCSH007)

- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.

Size	W.L.L (t)	B.L (t)	Dimension (mm)					N.W. (kg/pc)
			Φ	B	C	L	E	
6-8	1.12	4.48	34	8	32	180	28	0.73
7/8-8	2	8	46	9.5	37	227.5	34	1.3






G80 U.S. Eye Self-Locking Hook (TCSH008)

- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.


Size	W.L.L (lbs)	B.L (lbs)	Dimension (mm)						N.W. (kg/pc)
			Φ1	E	2	↕	K	L	
7/8-8	4500	18000	25	35	42	29.5	132	173.5	0.98
10-8	7100	28400	32.5	46	55	34.5	171	220.5	1.85
13-8	12000	48000	42	56	64	41.5	312	273.5	3.75



G80 U.S. Clevis Self-Locking Hook (TCSH009)

- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.


Size	W.L.L (lbs)	B.L (lbs)	Dimension (mm)						N.W. (kg/pc)
			A	E	Φ	H	K	L	
8-8	4500	18000	9.5	35	42	29.5	161.5	163.5	0.96
10-8	7100	28400	12	46	55	34.5	145	206	1.60
13-8	12000	48000	15	56	64	41.5	173	247	3.65



G80 U.S. Type Swivel Self-Locking Hook (TCSH010)

- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.


Size	W.L.L (lbs)	B.L (lbs)	Dimension (mm)						N.W. (kg/pc)
			A	E	Φ	H	K	E	
8-8	4500	18000	35.5	12.5	42	29.5	177	32	1.9
10-8	7100	28400	42	15	55	34.5	211.5	46	3.08
13-8	12000	48000	50	18	64	41.5	253.5	56	4.49



G80 U.S. Shank Self-Locking Hook (TCSH011)

- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.


Size	W.L.L (lbs)	B.L (lbs)	Dimension (mm)				N.W. (kg/pc)
			A	L	Φ	H	
5/16-8	4500	18000	25.4	199	42	29.5	1.27
3/8-8	7100	28400	29	243	55	34.5	2.00

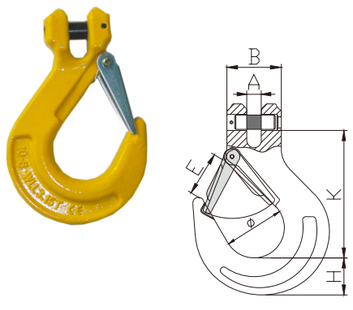

G80 Clevis Sling Hook With Latch(TCSH012)

- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.


Size	W.L.L (t)	B.L (t)	Dimension (mm)						N.W. (kg/pc)
			A	B	Φ	H	K	E	
6-8	1.12	4.48	8	32	35	23	76	26	0.32
7/8-8	2.0	8.0	9.5	37	37	32.5	85.5	29	0.52
10-8	3.15	12.8	13	49	46	35	104	39	1.05
13-8	5.3	21.2	16.5	56.5	56	42.5	128	47	2
16-8	8	32	221.5	70.5	60	54	150	55	3.7
20-8	12.5	50	24	77	79	58	180	61	6
22-8	15	60	27	91	101	62	213	72	10.4

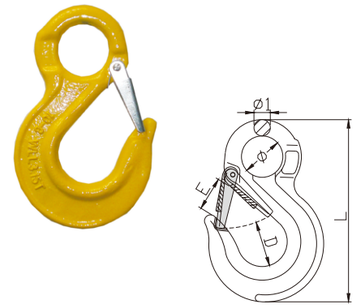

G80 EYE Sling Hook with Latch (TCSH013)

- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.


Size	W.L.L (t)	B.L (t)	Dimension (mm)					N.W. (kg/pc)
			Φ1	E	D	Φ	L	
6-8	1.12	4.48	9	24	21	20	108	0.3
7/8-8	2.0	8.0	11	30	56	25	133	0.4
10-8	3.15	12.6	15	34	39	38	167	0.9
13-8	5.3	21.2	19	39	54	43	213	1.7
16-8	8	32	23	46	64	50	255	3.2
20-8	12.5	50	24	40	80	62	305	5.8
22-8	15	60	32	71	80	62	348	8.5
26-8	21.2	84.8	35	81	82	64	394	13
32-8	31.5	126	37	102	112	88	480	17

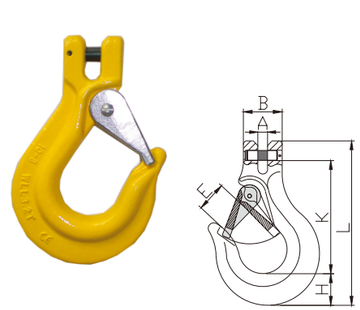

G80 Clevis Sling Hook with Cast Latch (TCSH014)

- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.


Size	W.L.L (t)	B.L (t)	Dimension (mm)						N.W. (kg/pc)
			A	E	B	H	K	L	
6/7-8	1.6	6.4	8	24	36	28	100	144	0.58
7-8	1.6	6.4	8.5	28	37.5	32	105	153	0.72
8-8	2	8	10	30	42	32.5	117	168	0.91
10-8	3.2	12.8	12	32	50	41	128	191.5	1.42
13-8	6	24	15	40	60	49	177	254.5	3.3

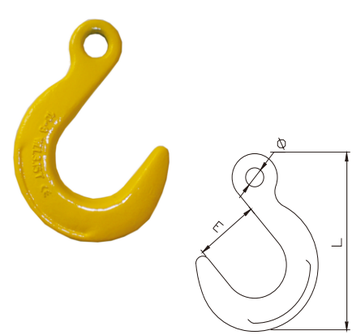

G80 Eye Foundry Hook (TCSH015)

- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.

Size	W.L.L (t)	B.L (t)	Dimension (mm)			N.W. (kg/pc)
			E	Φ	L	
6-8	1.6	6.4	63.5	18	163	1.09
8-8	2	8	63.5	18	163	1.09
10-8	3.2	12.8	76	22	200	2.03
13-8	5.4	21.6	89	27	238	3.22
16-8	8.2	32.8	102	32	278	5.26
20-8	12.8	51.2	114.5	38	325	9.1
22-8	15.5	62	127.5	45	361	11.3
26-8	21.5	86.4	140	66.5	402	16.8
32-8	32.8	131.2	153.5	81.5	461	26.6

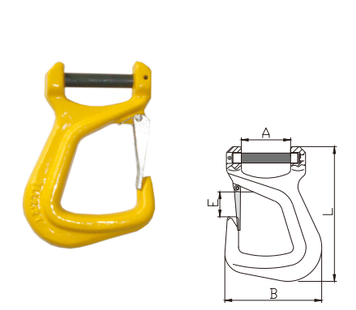

G80 Clevis Belt Hook (TCSH016)


- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.

Size	W.L.L (t)	B.L (t)	Dimension (mm)				N.W. (kg/pc)
			A	B	E	L	
2.2T	2..2	8.8	61	120	47	167	1.47



G80 Weld-On Hook (TCSH019)


- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.



Size	W.L.L (t)	B.L (t)	Dimension (mm)				N.W. (kg/pc)
			B	C	E	L	
2.0T	2	10	92	67	26.5	114	0.83
3.0T	3	15	106	73.5	30.5	129	1.2
5.0T	5	25	133	94	34	171	2.46
8.0T	8	40	136.5	94	34	177	3.26
10.0T	10	50	169.5	134.5	51	223	5.17

Italian Hook DIN 689 (TCSH020)






- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.

Size	W.L.L (t)	Dimension (mm)					N.W. (kg/pc)
		Φ	B	E	D	L	
250	0.25	12	52.5	18	7.5	88	0.15
500	0.5	16	70	23	10	117	0.32
1000	1	20	98	34	13	160	0.84
1600	1.6	22	111	37	16	186	1.3
2500	2.5	25	145	48	20	233	2.55

G80 Barrel Hook (TCSH022)






- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.

Size	W.L.L (t)	B.L (t)	Dimension (mm)			N.W. (kg/pc)
			Φ	D	L	
1T	1	4	38	71	118.5	0.7
2T	2	8	40	66	128	0.55

G80 Eye Grab Hook (TCSH027)






- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.

Size	W.L.L (t)	B.L (t)	Dimension (mm)					N.W. (kg/pc)
			E	D	H	K	L	
1/4"	1.2	4.8	8	13	19	54	81	0.13
9/32"	2	8	9.5	15	23	64	98	0.27
3/8"	3.2	12.8	12.5	20	30	82	125	0.55
1/2"	5.4	21.6	17	25	42	106	165	1.3
5/8"	8.2	32.8	20	30	49	127	196.5	2.48
3/4"	12.8	51.2	23	34.5	56	152	231.6	3.8
7/8"	15.5	62	28.6	40.5	65.6	175	267.6	5.8



G80 Clevis Grab Hook (TCSH028)




- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.

Size	W.L.L (lbs)	B.L (lbs)	Dimension (mm)						N.W. (kg/pc)
			A	E	B	H	K	L	
1/4"	3500	14000	10	9.5	38	23	65.3	106.5	0.66
3/8"	7100	28400	12.7	13	46	31	82	137	1.43
1/2"	12000	48000	16.5	16.5	61	41	113	184.5	3.75
5/8"	18100	72400	20	20	68.5	49	129.5	215	5.52
3/4"	28300	113200	24	24	88	58	152	254	9.35
7/8"	34200	136800	27.5	26.5	101	66	178	295	13.67

G80 Master Link Assemblies (TCSH032)






- Specification: EN1677-4, Chinese material and EN material for option
- Super Alloy Steel-Quenched and Tempered
- Individually Proof Test at 2.5 times Working Load Limited
- 4 Times safety factor design
- Flat press available upon request
- To make chain sling, refer to standard EN818-4
- To make wire rope sling, refer to standard DIN3088
- To make polyester sling, refer to standard EN1492-1

Size	W.L.L (t)	B.L (t)	Dimension (mm)								N.W. (kg/pc)
			A	B	D	a	b	d	s	H	
6-8	2.36	9.44	135	75	18	54	25	13	7	25	1.18
7-8	3.15	12.6	135	75	18	60	38	13	7	25	1.24
8-8	4.25	17	160	90	22	70	34	16	7	25	2.2
10-8	6.7	26.8	180	100	26	85	40	18	11	35	3.4
13-8	11.2	44.8	200	110	32	115	50	22	13	35	6.1
16-8	17	68	260	140	36	140	65	26	17	45	9.98
18-8	21.2	84.8	340	180	45	180	100	32	-	-	18.9
20-8	26.5	106	350	190	50	180	100	32	-	-	22.6
22-8	31.5	126	350	190	50	180	100	36	-	-	25.2
26-8	45	180	400	200	56	200	110	40	-	-	34.26
28-8	50	200	430	220	63	200	110	45	-	-	47.11
32-8	63	252	460	250	72	200	110	50	-	-	66.46




G80 Master Link (TCSH033)

- Specification: EN1677-4, Chinese material and EN material for option
- Super Alloy Steel-Quenched and Tempered
- Individually Proof Test at 2.5 times Working Load Limited
- 4 Times safety factor design
- Flat press available upon request
- To make chain sling, refer to standard EN818-4
- To make wire rope sling, refer to standard DIN3088
- To make polyester sling, refer to standard EN1492-1



Size	W.L.L (t)	B.L (t)	Dimension (mm)					N.W. (kg/pc)
			A	B	D	S	L	
7/6-8	1.6	6.4	110	60	13	7	25	0.34
8/7-8	2.12	8.48	110	60	16	7	25	0.54
10/8-8	3.15	12.6	135	75	18	7	35	0.823
13/10-8	5.3	21.2	160	90	22	11	35	1.5
16/13-8	8	32	180	100	26	13	45	2.32
18/16-8	11.2	44.8	200	110	32	17	45	3.95
20/18-8	14	56	260	140	36	-	-	6.34
22/20-8	17	68	300	160	40	-	-	8.96
26/22-8	21.2	84.8	340	180	45	-	-	12.8
32/26-8	31.5	126	350	190	50	-	-	16.55
36/32-8	45	180	400	200	56	-	-	23.28
40/36-8	56	224	430	220	63	-	-	32






Forged Pear Shape Link (TCSH034)

- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.

Size	W.L.L (lbs) Alloy (5:1)	W.L.L (lbs) Alloy (5:1)	Dimension (mm)				N.W. (kg/pc)
			A	B	C	D	
3/8"	3600	1800	10	28.5	19	10	0.1
1/2"	7000	2900	12.5	38	25.5	12.5	0.25
5/8"	9000	4200	16	47.5	32	16	0.5
3/4"	12300	6000	19	57	38	19	0.8
7/8"	14000	8300	22	67	44.5	22.2	1.4
1"	24360	10800	25	76	51	25.4	1.9
1-1/8"	30600	12000	28	86	57	28.5	2.92
1-1/4"	36000	16750	32	95	63.5	31.75	3.75
1-3/8"	43000	20500	35	105	70	35	5.12
1-1/2"	54300	25000	38	114	76	38	6.5






G80 Welded D Ring (TCSH035)

- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.

Size	W.L.L (t)	B.L (t)	Dimension (mm)			N.W. (kg/pc)
			A	B	D	
14-8	2.5	10	65	55	14	0.3
17-8	4.0	16	62	64	17	0.5
19-8	6.5	26	80	72	19	0.7
22-8	8.0	32	90	76	22	1.0






G80 Forged D Ring (TCSH036)

- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.

Size	W.L.L (t)	B.L (t)	Dimension (mm)			N.W. (kg/pc)
			A	B	D	
2.5T	2.5	10	65	55	14	0.3
4.0T	4	16	62	64	17	0.48
6.5T	6.5	26	80	72	19	0.71
8.0T	8.0	32	90	76	22	1.0






Forged Delta Ring (TCSH037)

- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.

Size	W.L.L (lbs)	B.L (lbs)	Dimension (mm)			N.W. (kg/pc)
			D	Φ	L	
3"	4500	18000	79	14	96	0.66
4"	5000	20000	110	16	118.5	0.38






Forged Round Ring (TCSH038)

- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.

Size	W.L.L (t)	B.L (t)	Dimension (mm)		N.W. (kg/pc)
			A	B	
3/8x2	0.5	3	10	50	0.11
1/2x2	1	6	13	50	0.21
5/8x3	1.5	9	16	76	0.46
5/8x3-5/16	1.5	9	16	84	0.5
3/4x3	2.3	13.8	19	76	0.67
3/4x4	2.5	15	19	102	0.84
7/8x4	3.3	19.8	22	102	1.2
7/8x5-1/2	2.5	15	22	140	1.55
1x4	4.9	29.4	25	102	1.59
1x5-1/2	4.9	29.4	25	140	2.1
1-1/8x6	4.7	28.2	28	152	2.87
1-1/4x5	7.7	46.2	32	127	3.1
1-1/4x6	7.7	46.2	32	152	3.6
1-1/4x10	7.7	46.2	32	254	5.6
1-3/8x6	8.6	51.6	35	152	4.5
1-1/2x8	11.3	67.8	38	203	6.8
1-1/2x8-3/4	11.3	67.8	38	222	7.32
1-1/2x10	11.3	67.8	38	254	8.22
2x12	15.9	95.4	38	305	17.8






G80 Eye Hook with Latch (TCSH039)

- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.

Size	W.L.L (t)	B.L (t)	Dimension (mm)						N.W. (kg/pc)
			Φ	E	B	H	K	L	
6-8	1.12	4.48	19	22	19	80	110		0.28
7/8-8	2	8	28	25	25	103	140.5		0.65
10-8	3.15	12.6	31	27.5	28	118	162		0.94
13-8	5.3	21.2	39	33	35	145	201		1.95
16-8	8	32	51	40	45	180	256		3.77
20-8	12.5	50	62	51	57	230	317		6.8
22-8	15	60	73	57	70	260	360		9.8
26-8	21.2	84.8	89	75	76	318	434		16.25
32-8	31.5	126	90	98	91	360	495.5		27.5





G80 Swivel Hook with Latch (TCSH040)

- Powder coated, different color is available as per request.
- Working load limit permanently shown on the body.
- Max proof load is 2.5 times of the working load limited.
- Min. Breaking strength is 4 times of the W.L.L.

Size	W.L.L (t)	B.L (t)	Dimension (mm)							N.W. (kg/pc)
			A	E	B	H	K	L	M	
6-8	1.12	5	32	22	17	9	109	137	16	0.34
7/8-8	2	8	42	21.5	35	15.8	150	192	21	1.02
10-8	3.15	12.8	42.5	26	35	15.8	162.5	208.5	23	1.24
13-8	5.3	21.6	48	32.5	39	18	191	246	31	3.60
16-8	8.0	32.8	62	43	53	25	243.5	313	34	4.66
20-8	12.5	50	68	49.5	51	28.5	276.5	363.5	41.5	7.40
22-8	15	60	79	54.5	65	32	332	431	55.7	10.6
26-8	21.2	84.8	105	81	114	40	429.5	545.5	70	21.4
32-8	31.5	126	105	100	96	40	465.3	596	76.2	32